

MULTI & MUCROSS LIFT

ELECTRO

[MUCROSS SUPER LOW SERIES]

CAPACITY 3,000kg


Above Ground Model

Super low minimum height (above ground) - minimum height only 165mm




Key Features

Min.Height



• **MUL30, MUL30E**
Minimum Height = 165mm

APPLICABLE WHEELBASE AT MAX.



• **3,300mm**

OPTION


JACKING BEAM NRJ20



See page 30 for more detail

Specifications

MUL30

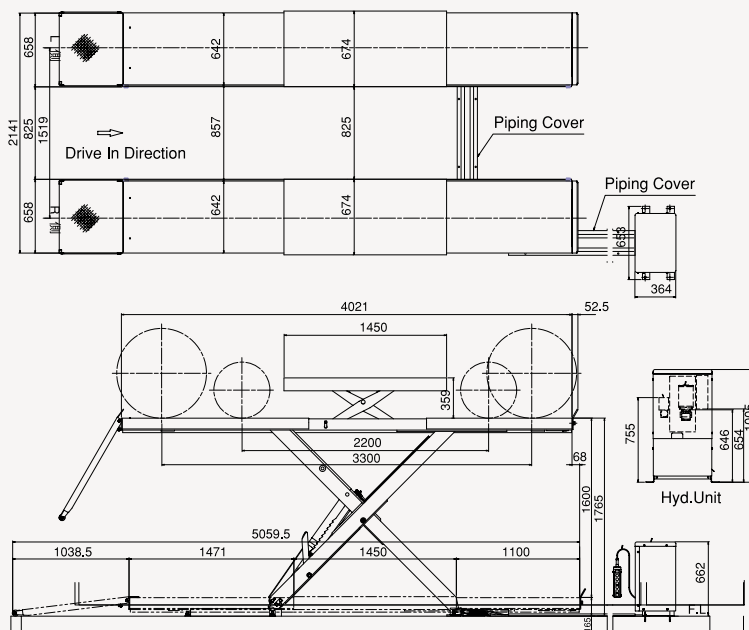

Model No.		MUL30	MUL30E
Installation		Above Ground	
Capacity	Lower Lift	3,000kg	
	Upper Lift	2,000kg	—
Drive on Plate Length		4,000mm	
Control		Cable remote control switch	
Power		3 phase	
Lifting Time (Approx)	Lower Lift	60Hz	65 sec.
		50Hz	78 sec.
	Upper Lift	60Hz	11 sec.
		50Hz	13 sec.
Lowering Time (Approx)	Lower Lift	31 sec.	
	Upper Lift	10 sec.	—
Motor		1.5kW	
Oil Volume		18L (ISO VG32)	
Air pressure		0.5~1.0MPa	